


SUBMERSIBLE SOLIDS HANDLING PUMP

DUPLEX TL(X)44HH AND TL(X)46HH

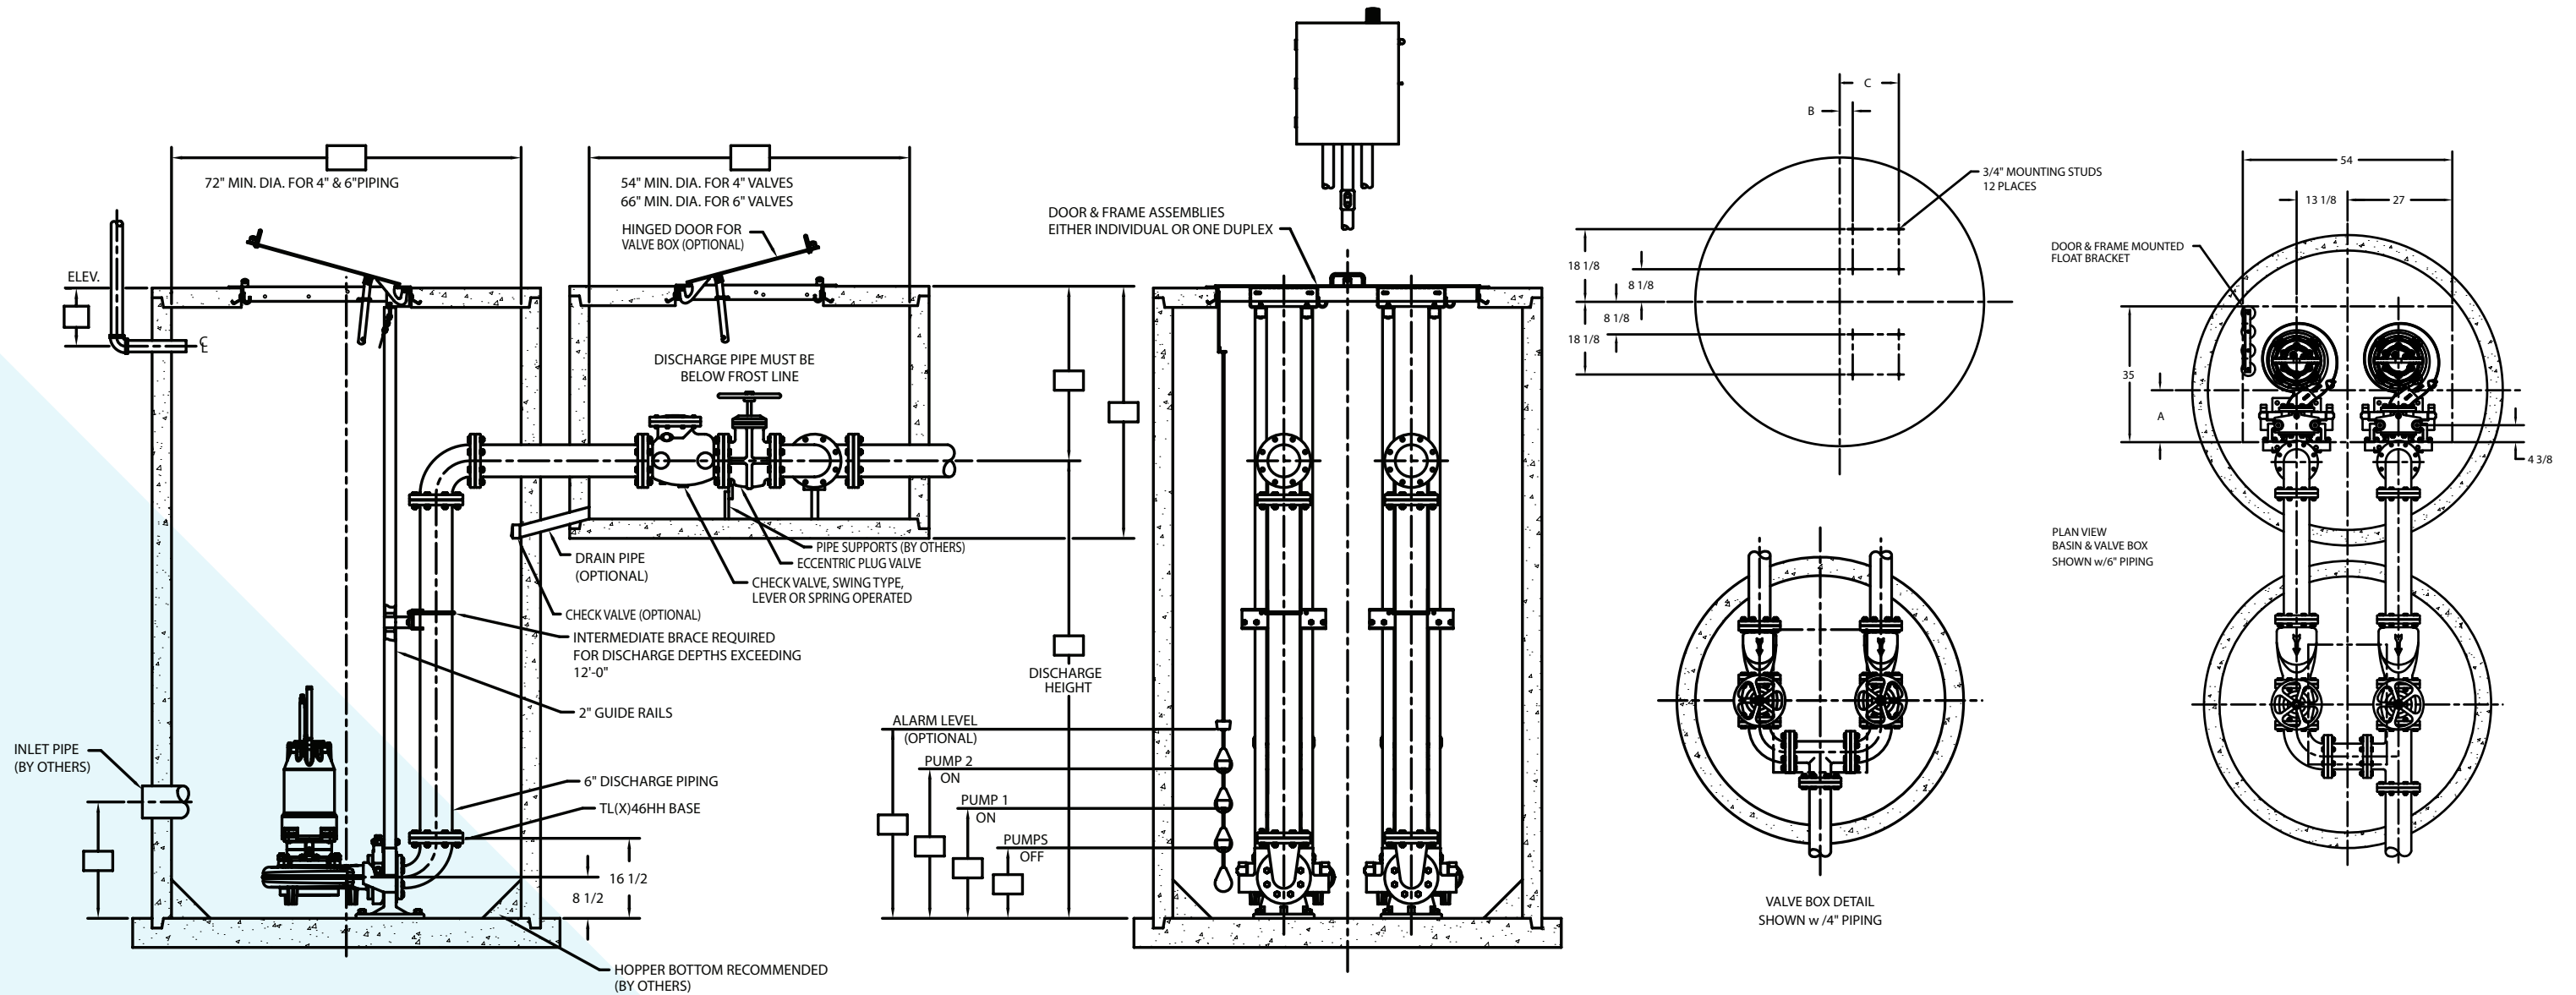

FOR MODELS: *3SC, 4HC, 4SD, AND 4HD

| MIN. SUMP DIA. | MIN. VALVE BOX DIA. | PIPING SIZE | A | B | C |
|----------------|---------------------|-------------|--------|--------|---------|
| 6' - 0" | 4' - 6" | 4" | 14-3/8 | 4-1/4" | 15-3/4" |
| 6' - 0" | 5' - 6" | 6" | 13-3/8 | 3-1/4" | 14-3/4" |

*3SC requires a 3" X 4" adapter.

1101 Myers Parkway
Ashland, OH 44805
Ph: 855.274.8947
Fx: 800.426.9446

490 Pinebush Rd., Unit 4
Cambridge, Ontario N1T 0A5, Canada
Ph: 800.363.7867
Fx: 888.606.5484

pentair.com/hydromatic

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2024 Pentair. All Rights Reserved.

HYD12708 (01-08-24)